



WARATAH MARINE.com.au


Advice on how to best prep you load for us to deliver.

Most of the materials that we will be delivering for you will be lifted by crane. When packing loads to be delivered by truck and subsequently lifted by a crane, several key considerations ensure the safety of the load, personnel, and the equipment involved. Here are instructions for packing loads to be delivered by truck to a crane:

1. **Understand Load Specifications:** Know the weight, dimensions, and center of gravity of the load. This information is crucial for selecting appropriate packing materials and securing the load for transport and lifting.
2. **Select Suitable Packaging:** Use appropriate packing materials like crates, pallets, or containers that are sturdy and suitable for the type of load being transported. Ensure the packing material can be easily lifted by the crane. If you are sending bricks, a brick cage is best, if you are sending beams or frames consider using Stillages.
3. **Label and Document:** Clearly label the load with any handling instructions or warnings. Additionally, document any special considerations for the crane operator upon arrival, such as the load's lifting points or delicate areas.
4. **Communication and Coordination:** Establish communication between the truck driver, ground crew, and the crane operator for the offloading process. Ensure everyone is aware of the lifting plan and their roles.
5. **Unload Preparation:** Upon arrival at the loading site, park the truck in a designated, safe location, and ensure the ground is level and stable for the crane operation. Make contact with the crane operator or yard manager.
6. **Ensure Safe Unloading:** Stand clear of the crane's operation zone during unloading. Provide any necessary assistance to the crane operator for securing the load during the lifting process.
7. **Post-Lifting Inspection:** After the lift, and the load is on the barge deck, inspect the load for any damage that might have occurred during the unloading process.

In some situations (like wheeled road cases) it might be more convenient to hand load or wheel loads onto the barge for delivery. Remember, safety is paramount throughout the transportation and lifting process. Following these instructions will help ensure a smooth, safe, and efficient transfer of the load from the truck to the crane for lifting.

Delivery's to: Shipping Wharf 2 Glebe Island
Access Via: 37 James Craig Road Rozelle
Mail to: 2/30 Hordern Street
Newtown Sydney 2042

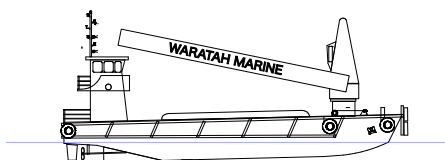

Ph: 02 9555 1222
admin@waratahmarine.com.au
WARATAH MARINE.com.au

ABN: 13 671343 614